




SELF-PROPELLED ARTICULATING BOOMS


Z™-34/22N



Specifications

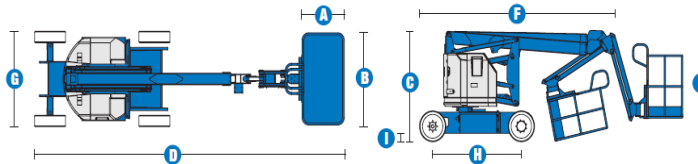

RANGE OF MOTION Z™-34/22N

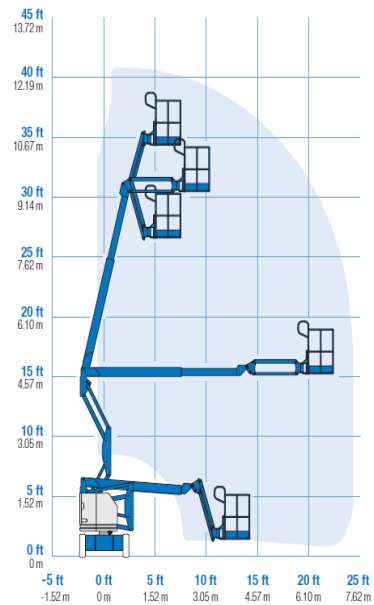

MODEL		Z™-34/22N	
MEASUREMENTS	Metric	US	
Working height maximum*	12.52 m	40 ft 6 in	
Platform height maximum	10.52 m	34 ft 6 in	
Horizontal reach maximum	6.78 m	22 ft 3 in	
Up-and-over clearance maximum	4.65 m	15 ft 3 in	
A Platform length	76 cm	2 ft 6 in	
B Platform width	1.42 m	4 ft 8 in	
C Height - stowed	2 m	6 ft 7 in	
D Length - stowed	5.72 m	18 ft 9 in	
E Storage height	2.26 m	7 ft 5 in	
F Storage length	4.19 m	13 ft 9 in	
G Width	1.47 m	4 ft 10 in	
H Wheelbase	1.88 m	6 ft 2 in	
I Ground clearance - centre	14 cm	5.5 in	

PRODUCTIVITY

Lift capacity	227 kg	500 lbs
Platform rotation	180°	180°
Vertical jib rotation	139° (+72°/-67°)	139° (+72°/-67°)
Turntable rotation	355° non-continuous	
Turntable tailswing	zero	zero
Drive speed - stowed	6.4 km/h	4.0 mph
Drive speed - raised**	1.1 km/h	0.68 mph
Gradeability***	35%	35%
Turning radius - inside	2.13 m	7 ft
Turning radius - outside	4.10 m	13 ft 5 in
Controls	24 V DC proportional	
Tyres (solid rubber, non-marking, treaded)	56 cm x 18 cm x 45 cm	22 x 7 x 17.75 in

POWER

Power source	48 V DC (eight- 6V batteries 315 Ah capacity)	
Auxiliary power unit	24 V DC	24 V DC
Hydraulic tank capacity	15.1 L	4 gal

WEIGHT****

	5,171 kg	11,400 lbs
--	----------	------------

STANDARDS COMPLIANCE CE EN280, PB-10-611-03

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** In lift mode (platform raised), the machine is designed to operate on firm, level surfaces only.

*** Gradeability applies to driving on slopes. See Operator's Manual for details regarding slope ratings.

**** Weight will vary depending on options and/or country standards.