




## SELF-PROPELLED SCISSOR LIFTS

# GS™-3390 RT, GS™-4390 RT & GS™-5390 RT

## Specifications

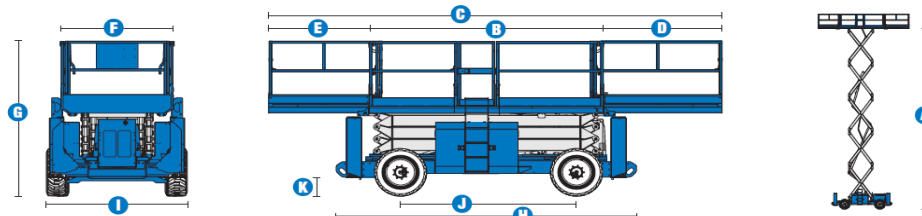

MODELS	GS™-3390 RT		GS™-4390 RT		GS™-5390 RT	
	Metric	US	Metric	US	Metric	US
Working height maximum*	12.10 m	39 ft	15.11 m	49 ft	18.15 m	59 ft
<b>A</b> Platform height maximum	10.10 m	33 ft	13.11 m	43 ft	16.15 m	53 ft
<b>B</b> Platform length:	3.89 m	12 ft 8 in	3.89 m	12.8 in	3.89 m	12 ft 8 in
outside, extended single deck	5.34 m	17 ft 6.25 in	5.34 m	17 ft 6.25 in	5.34 m	17 ft 6.25 in
<b>C</b> outside, extended dual deck	6.57 m	21 ft 6.5 in	6.57 m	21 ft 6.5 in	6.57 m	21 ft 6.5 in
<b>D</b> Slide-out platform extension deck - front	1.52 m	5 ft	1.52 m	5 ft	1.52 m	5 ft
<b>E</b> Slide-out platform extension deck - rear	1.22 m	4 ft	1.22 m	4 ft	1.22 m	4 ft
<b>F</b> Platform width - outside	1.83 m	6 ft	1.83 m	6 ft	1.83 m	6 ft
Platform height - stowed**	1.55 m	5 ft 1 in	1.80 m	5 ft 11 in	2.02 m	6 ft 7.5 in
<b>G</b> Height - stowed	2.71 m	8 ft 10.5 in	2.93 m	9 ft 7.5 in	3.15 m	10 ft 4 in
rails lowered	2.03 m	6 ft 7.75 in	2.25 m	7 ft 4.75 in	2.47 m	8 ft 1.25 in
<b>H</b> Length - stowed: single deck	3.94 m	12 ft 11.25 in	3.94 m	12 ft 11.25 in	—	—
dual deck	3.98 m	13 ft .5 in	3.98 m	13 ft .5 in	—	—
with outriggers	4.88 m	16 ft	4.88 m	16 ft	4.88 m	16 ft
Length - extended: single deck	5.40 m	17 ft 8.5 in	5.40 m	17 ft 8.5 in	5.40 m	17 ft 8.5 in
dual deck	6.57 m	21 ft 6.5 in	6.57 m	21 ft 6.5 in	6.57 m	21 ft 6.5 in
super deck	7.38 m	24 ft	7.38 m	24 ft	7.38 m	24 ft
<b>I</b> Width - standard tyres	2.29 m	7 ft 6 in	2.29 m	7 ft 6 in	2.29 m	7 ft 6 in
high flotation tyres	2.57 m	8 ft 5 in	2.57 m	8 ft 5 in	2.57 m	8 ft 5 in
<b>J</b> Wheelbase	2.84 m	9 ft 4 in	2.84 m	9 ft 4 in	2.84 m	9 ft 4 in
<b>K</b> Ground clearance - centre	36 cm	1 ft 2 in	36 cm	1 ft 2 in	36 cm	1 ft 2 in

PRODUCTIVITY						
Max platform occupancy	7	7	7	7	4	4
Lift capacity	1,134 kg	2,500 lbs	680 kg	1,500 lbs	680 kg	1,500 lbs
Drive speed - stowed	6.4 km/h	4.0 mph	6.4 km/h	4.0 mph	6.4 km/h	4.0 mph
Drive speed - raised	1.1 km/h	0.7 mph	1.1 km/h	0.7 mph	1.1 km/h	0.7 mph
Gradeability***	50%	50%	50%	50%	40%	40%
Turning radius - inside	2.16 m	7 ft 1 in	2.16 m	7 ft 1 in	2.16 m	7 ft 1 in
Turning radius - outside	5.33 m	17 ft 6 in	5.33 m	17 ft 6 in	5.33 m	17 ft 6 in
Controls	proportional	proportional	proportional	proportional	proportional	proportional
Raise / lower speed	45 / 29 sec	45 / 29 sec	45 / 39 sec	45 / 39 sec	55 / 49 sec	55 / 49 sec
Tyres - foam-filled rough terrain	30 x 84 cm	12 x 33 in	30 x 84 cm	12 x 33 in	30 x 84 cm	12 x 33 in

POWER						
Power source	Deutz diesel D2011L03i 49 hp (36 kW), air cooled/ Ford DSG-423 4 cylinder petrol/LPG 75 hp (56 kW)					
Fuel tank capacity	113.6 L	30 gal	113.6 L	30 gal	113.6 L	30 gal
Hydraulic system capacity	113.6 L	30 gal	113.6 L	30 gal	113.6 L	30 gal

WEIGHT****						
	5,533 kg	12,198 lbs	5,949 kg	13,115 lbs	7,615 kg	16,788 lbs
Unit weight modifiers for options						
Outriggers*****	add 760 kg	1,676 lbs	add 780 kg	1,720 lbs	—	—
Dual Extension decks	add 165 kg	364 lbs	add 165 kg	364 lbs	add 165 kg	364 lbs
Super deck	add 220 kg	485 lbs	add 220 kg	485 lbs	add 220 kg	485 lbs
Non marking tyres RT	add 466 kg	1,027 lbs	add 466 kg	1,027 lbs	add 466 kg	1,027 lbs

STANDARDS COMPLIANCE						
	CE EN280, PB-10-611-03					

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.  
 \*\* Based on RT tyres. Deduct 5.8 cm (2 in) non-marking tyres.  
 \*\*\* Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.  
 \*\*\*\* Weight will vary depending on options and/or country standards  
 \*\*\*\*\* Standard on GS-5390RT and with super deck.